

DT107

THREAD TYPE DIAPHRAGM SEAL

Approvals:



RANGE

0 ~ 6 ...
40 bar

SIZE

1/4 ...
1/2 Inch

MEDIA

**Liquid
&
Gas**

SPECIFICATION

MODEL	DT107
CONNECTION	1/4", 3/8", 1/2" NPT, PF Male
BODY MATERIAL	316SS
MEMBRANE MATERIAL	316LSS
TEMPERATURE LIMITED	-40 ~ 150°C Max. 350°C* [with cooling element]



*=Optional



CONNECTABLE DEVICE

DT107

DIMENSION (mm)



Item	Description of parts
a	Upper housing
b	Lower housing
c	Membrane
d	Instrument connection
e	Filling port
f	Process connection


제품의 사양에 따라 변경 될 수 있습니다.

CONNECTABLE DEVICES

Model	PG	PGS	DPG3500	DPG3000	PT3100	PT5000
Accuracy	±1.6% F.S.	±1.0% F.S.	±1.0% F.S.	±0.5% F.S.	±0.5% F.S.	±0.2% F.S.
Gauge outdia.	60mm	100mm	80mm	75mm		
Output					DC4-20mA	DC4-20mA
Range	0 ~ 6 0 ~ 10 0 ~ 16 0 ~ 25 0 ~ 40	0 ~ 7 0 ~ 10 0 ~ 16 0 ~ 20 0 ~ 25 0 ~ 28 0 ~ 35 0 ~ 40	0 ~ 7 0 ~ 14 0 ~ 20 0 ~ 35	0 ~ 7 0 ~ 35	0 ~ 6 0 ~ 10 0 ~ 16 0 ~ 25 0 ~ 40	0 ~ 6 0 ~ 10 0 ~ 16 0 ~ 25 0 ~ 40
Unit : bar or kg/cm2						

FLOW | PRESSURE | TEMPERATURE | AC | DC | BATTERY | OUTPUT | CONTACT | DISPLAY

Ordering Information

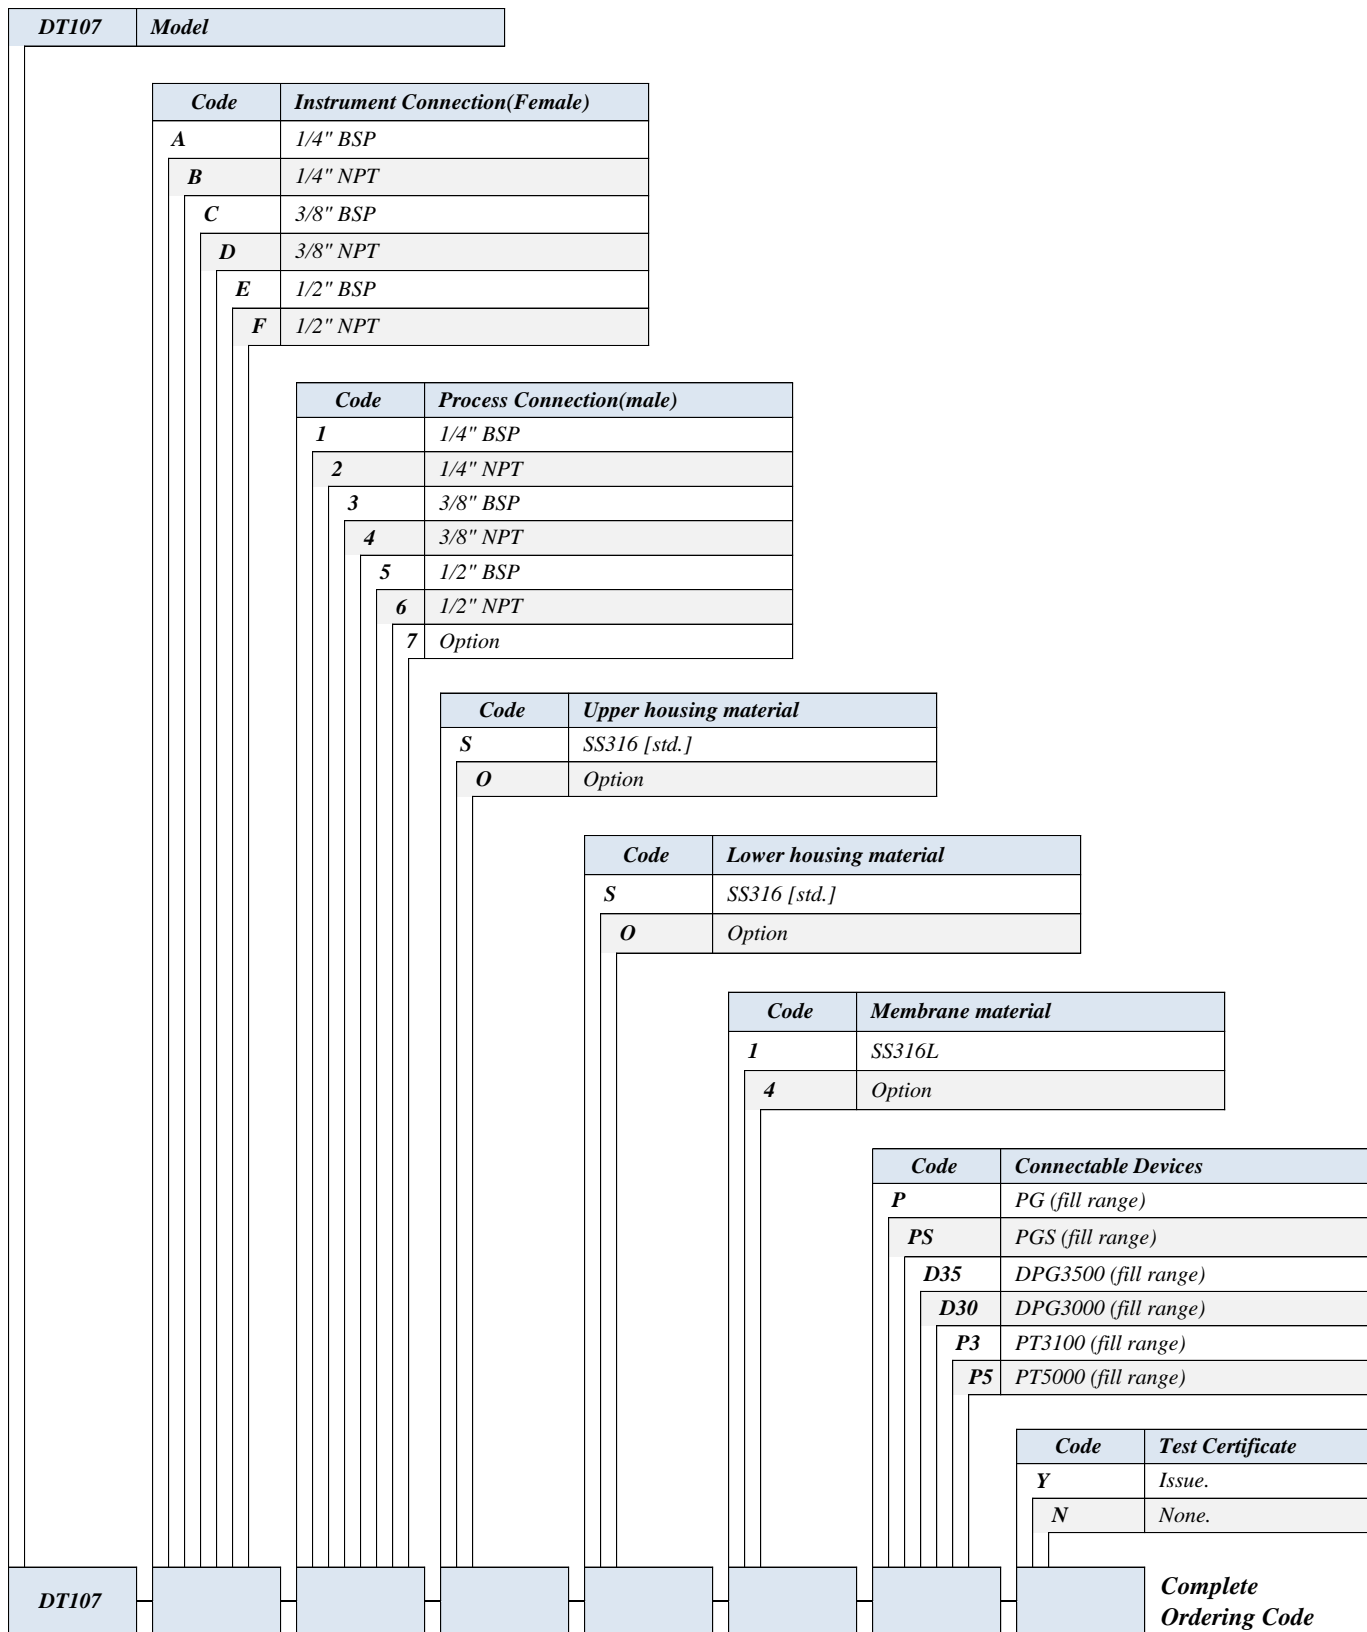

| FLOW | | PRESSURE | | TEMPERATURE | | AC | | DC | | BATTERY | | OUTPUT | | CONTACT | | DISPLAY |