

DPH400

DIAPHRAGM TYPE DIFFERENTIAL PRESSURE GAUGE

RANGE

0 ~ 50 ...
600 mmH2O

ACCURACY

+ / -
2.5 %

MEDIA

**Liquid
&
Gas**



SPECIFICATION

MODEL	DPH400
APPLICATION	Liquid & Gas
ACCURACY	±2.5% F.S. [on rising pressure]
SIZE	100mm 150mm*
MATERIAL	Housing : 316SS Wetted Parts : Diaphragm-NBR Other parts-316SS
CONNECTION	1/4" NPT Female 1/4" PT Available* [with adapter]
WORKING PRESSURE	30 kgf/cm ² [Both of high & low side must be pressured on line at the same time]
WORKING TEMPERATURE	Max. 80°C Max. 150°C* [with cooling element]
HOUSING PROTECTION	IP66 *=-Optional

Approvals:



Range [single scale]		
CODE	mmH2O	kg/cm ²
01R	0~10~50 mmH2O	0 ~ 0.005 kg/cm ²
02R	0~25~100 mmH2O	0 ~ 0.01 kg/cm ²
03R	0~40~200 mmH2O	0 ~ 0.02 kg/cm ²
04R	0~60~300 mmH2O	0 ~ 0.03 kg/cm ²
05R	0~80~400 mmH2O	0 ~ 0.04 kg/cm ²
06R	0~120~600 mmH2O	0 ~ 0.06 kg/cm ²

ACCESSORY

ADAPTER



316SS
250bar at 25°C
1/4"NPT [M] x 1/4"PT [F]


COOLING ELEMENT



CP
316SS
250bar at 25°C
Temperature Limit : Max. 150°C
1/4"NPT [M] x 1/4"PT [F]

| FLOW | | PRESSURE | | TEMPERATURE | | AC | | DC | | BATTERY | | OUTPUT | | CONTACT | | DISPLAY |

DIMENSION (mm)

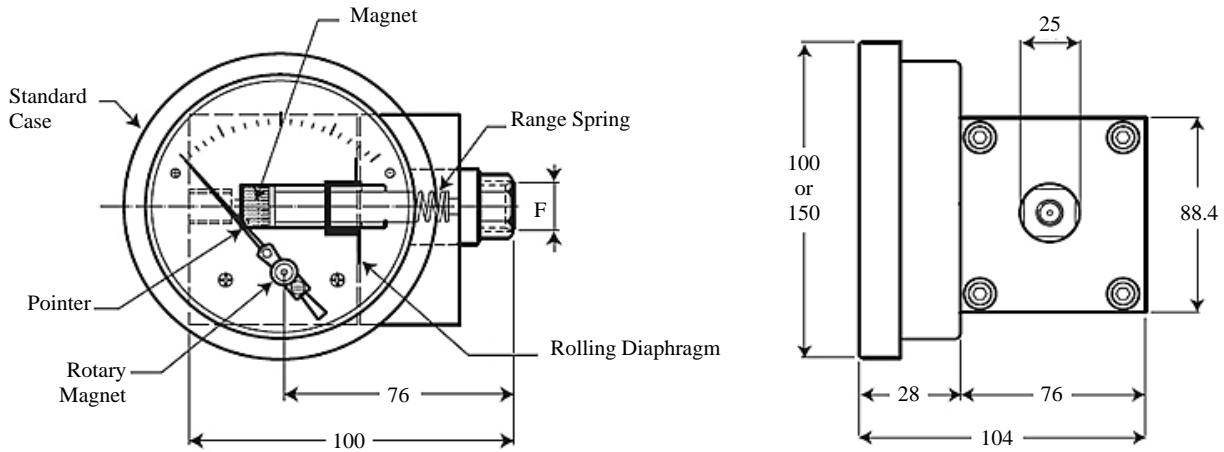

※ 제품의 사양에 따라 변경 될 수 있습니다

Ordering Information

DPH400	Model																												
	<table border="1"> <thead> <tr> <th>Code</th> <th>Dial Size</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>100 ϕ (standard)</td> </tr> <tr> <td>B</td> <td>150ϕ</td> </tr> </tbody> </table>	Code	Dial Size	A	100 ϕ (standard)	B	150 ϕ																						
Code	Dial Size																												
A	100 ϕ (standard)																												
B	150 ϕ																												
	<table border="1"> <thead> <tr> <th>Code</th> <th>Range</th> <th>Code</th> <th>Range</th> </tr> </thead> <tbody> <tr> <td>01R</td> <td>0~ 10~ 50 mmH₂O</td> <td>01R</td> <td>0 ~ 0.005 kg/cm²</td> </tr> <tr> <td>02R</td> <td>0~ 25~100 mmH₂O</td> <td>02R</td> <td>0 ~ 0.01 kg/cm²</td> </tr> <tr> <td>03R</td> <td>0~ 40~200 mmH₂O</td> <td>03R</td> <td>0 ~ 0.02 kg/cm²</td> </tr> <tr> <td>04R</td> <td>0~ 60~300 mmH₂O</td> <td>04R</td> <td>0 ~ 0.03 kg/cm²</td> </tr> <tr> <td>05R</td> <td>0~ 80~400 mmH₂O</td> <td>05R</td> <td>0 ~ 0.04 kg/cm²</td> </tr> <tr> <td>06R</td> <td>0~120~600 mmH₂O</td> <td>06R</td> <td>0 ~ 0.06 kg/cm²</td> </tr> </tbody> </table>	Code	Range	Code	Range	01R	0~ 10~ 50 mmH ₂ O	01R	0 ~ 0.005 kg/cm ²	02R	0~ 25~100 mmH ₂ O	02R	0 ~ 0.01 kg/cm ²	03R	0~ 40~200 mmH ₂ O	03R	0 ~ 0.02 kg/cm ²	04R	0~ 60~300 mmH ₂ O	04R	0 ~ 0.03 kg/cm ²	05R	0~ 80~400 mmH ₂ O	05R	0 ~ 0.04 kg/cm ²	06R	0~120~600 mmH ₂ O	06R	0 ~ 0.06 kg/cm ²
Code	Range	Code	Range																										
01R	0~ 10~ 50 mmH ₂ O	01R	0 ~ 0.005 kg/cm ²																										
02R	0~ 25~100 mmH ₂ O	02R	0 ~ 0.01 kg/cm ²																										
03R	0~ 40~200 mmH ₂ O	03R	0 ~ 0.02 kg/cm ²																										
04R	0~ 60~300 mmH ₂ O	04R	0 ~ 0.03 kg/cm ²																										
05R	0~ 80~400 mmH ₂ O	05R	0 ~ 0.04 kg/cm ²																										
06R	0~120~600 mmH ₂ O	06R	0 ~ 0.06 kg/cm ²																										
	<table border="1"> <thead> <tr> <th>Code</th> <th>Wetted Parts Material</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>SS316</td> </tr> </tbody> </table>	Code	Wetted Parts Material	A	SS316																								
Code	Wetted Parts Material																												
A	SS316																												
	<table border="1"> <thead> <tr> <th>Code</th> <th>Process Connection</th> </tr> </thead> <tbody> <tr> <td>I</td> <td>1/4"NPT female</td> </tr> </tbody> </table>	Code	Process Connection	I	1/4"NPT female																								
Code	Process Connection																												
I	1/4"NPT female																												
	<table border="1"> <thead> <tr> <th>Code</th> <th>Accessory</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Without (standard)</td> </tr> <tr> <td>1</td> <td>Adapter 1/4"PT</td> </tr> <tr> <td>2</td> <td>CP (Cooling element)</td> </tr> </tbody> </table>	Code	Accessory	0	Without (standard)	1	Adapter 1/4"PT	2	CP (Cooling element)																				
Code	Accessory																												
0	Without (standard)																												
1	Adapter 1/4"PT																												
2	CP (Cooling element)																												
	<table border="1"> <thead> <tr> <th>Code</th> <th>Test Certificate</th> </tr> </thead> <tbody> <tr> <td>Y</td> <td>Issue.</td> </tr> <tr> <td>N</td> <td>None.</td> </tr> </tbody> </table>	Code	Test Certificate	Y	Issue.	N	None.																						
Code	Test Certificate																												
Y	Issue.																												
N	None.																												
DPH400	<table border="1"> <tbody> <tr> <td>A</td> <td>I</td> <td>0</td> <td>Y</td> </tr> </tbody> </table>	A	I	0	Y																								
A	I	0	Y																										

Complete Ordering Code

| FLOW | | PRESSURE | | TEMPERATURE | | AC | | DC | | BATTERY | | OUTPUT | | CONTACT | | DISPLAY |