

DISPLAY	INPUT	OUTPUT
LED 4-Digit	4-20 mA	4-20 mA 2-Relay




SPECIFICATION

MODEL	WLD
DISPLAY	1 or 2-Line 4 Digits Red LED
ACCURACY	±0.2% F.S.
SAMPLING CYCLE	200ms
INPUT	DC4-20mA
OUTPUT	None DC4-20mA+2-Relays output* 1~5VDC+2-Relays output*
SWITCH DATA	DC24V-1A, AC120V-1A, AC240V-0.5A
AMBIENT TEMPERATURE	-10 to 60℃
HOUSING MATERIAL	Steel
POWER	AC110 / 220V, 50~60Hz
FEATURE	Adjustable Scale & Decimal Point Peak Hold Correction of error Adjustable Dead Band [2-digit] Built in power supply for transmitter [DC24V]
MOUNTING	Wall mounting Type


| FLOW |
 | PRESSURE |
 | TEMPERATURE |
 | AC |
 | DC |
 | BATTERY |
 | OUTPUT |
 | CONTACT |
 | DISPLAY |

DIMENSION (mm)

※ 제품의 사양에 따라 변경 될 수 있습니다

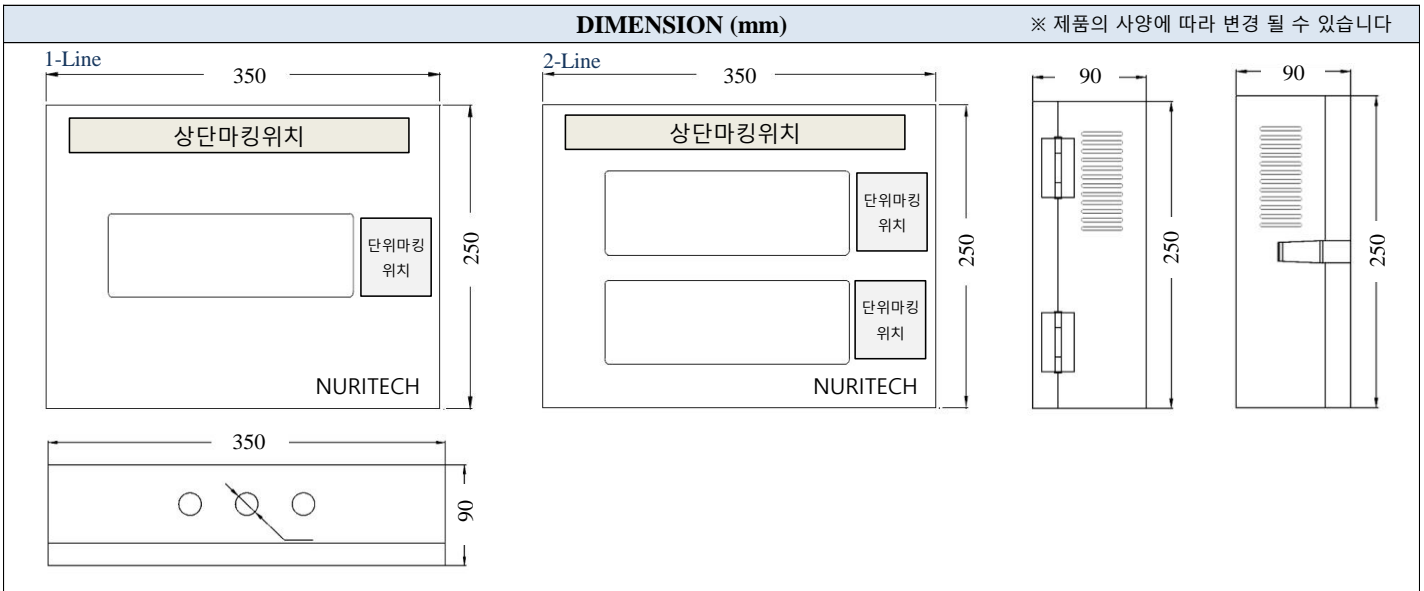

Ordering Information

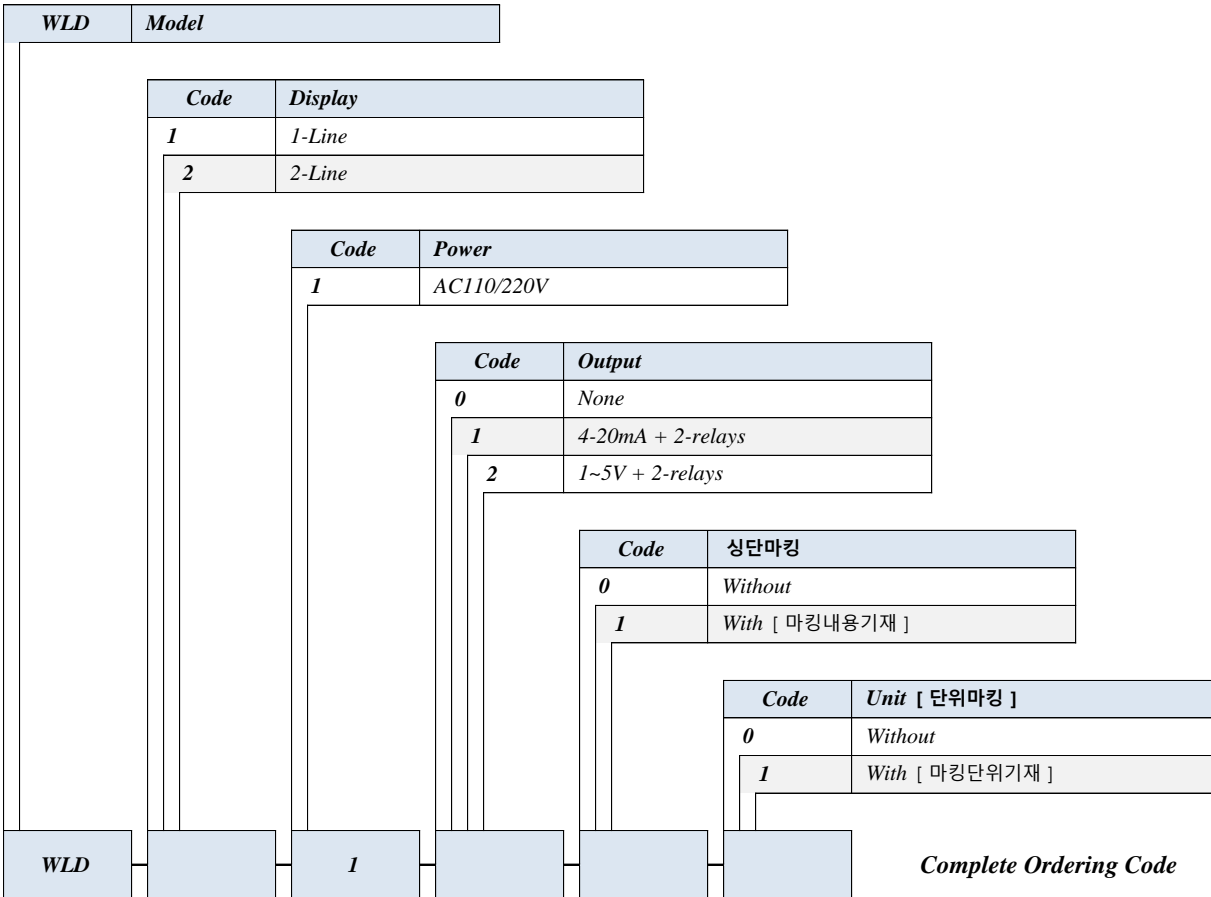

FLOW | PRESSURE | TEMPERATURE | AC | DC | BATTERY | OUTPUT | CONTACT | DISPLAY

RELATED PRODUCTS

Pressure Transmitter

▶ 1/2" Pressure | 입력센서, 출력기

TST-10 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	TST-20 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	PHS 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
PT100 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	PT5000 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	PHM 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
TST-50A 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	Z11A 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	SL11 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V
SMO 출력: mA/V 정밀도: ±0.5% 공급: 12~30V		

Flush Diaphragm Transmitter

▶ 1/2" Pressure | 입력센서, 출력기

PHD 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	CIT-F 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	PT6000G 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V
PHD-E.S 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	PHD-E.S 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	

Corrosion Resistance Transmitter

▶ 1/2" Pressure | 입력센서, 출력기

SPT2-P 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	SPT2-T 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	AT18 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
SDI2-S-P 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	SDI2-S-T 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	DT14 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
DT12 출력: mA/V 정밀도: ±0.5% 공급: 12~30V		

Pressure Transmitter with Display

▶ 1/2" Pressure | 입력센서, 표시기

SPD2 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	SPD3 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	LTD 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
PHD-E.S 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	TMP4433 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	PHM2 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
PHM3 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	SDI2-S-P 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V	SDI2-S-T 출력: 4-20mA 정밀도: ±0.5% 공급: 12~30V

Explosion Proof Transmitter

▶ 1/2" Pressure | 입력센서, 출력기

PHD-EX 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	PHD-E.S 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	TMP4433 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
PHD-E.S 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	PHD-E.S 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	

Diff. Pressure Transmitter

▶ 1/2" Pressure | 입력센서, 표시기/출력기

T18 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	T18-LW 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	SLD 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
HN20 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	TST-004 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	DP30 출력: mA/V 정밀도: ±0.5% 공급: 12~30V
PHD-EX 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	TMP4433 출력: mA/V 정밀도: ±0.5% 공급: 12~30V	