

THERMOWELL

THREAD TYPE THERMOWELL

Approvals:



SIZE	STEM LENGTH	MATERIAL
1/2" ~ 2"	Max. 1000 mm	STS HASTELLOY C TEFLON etc.



Teflon lining thermowell with RTD





Thermowell

SPECIFICATION

MODEL	Welded type : WST, WLT Drilled bar stock type : BST,BLT,BTT,BTLT,BPST,BPLT
MATERIAL	Carbon Steel / Brass 304SS / 316SS / 316LSS Monel Hastelloy C276 Titanium Teflon Lining
PROCESS FLANGE SIZE	1/2", 3/4", 1", 1-1/2", 2" NPT Other connection available
LAG LENGTH "T"	3", 6" Other length available
BORE DIAMETER "B"	6, 7, 8, 9, 10 mm
STEM LENGTH	Max. 1000mm


THREAD WELLS SERIES

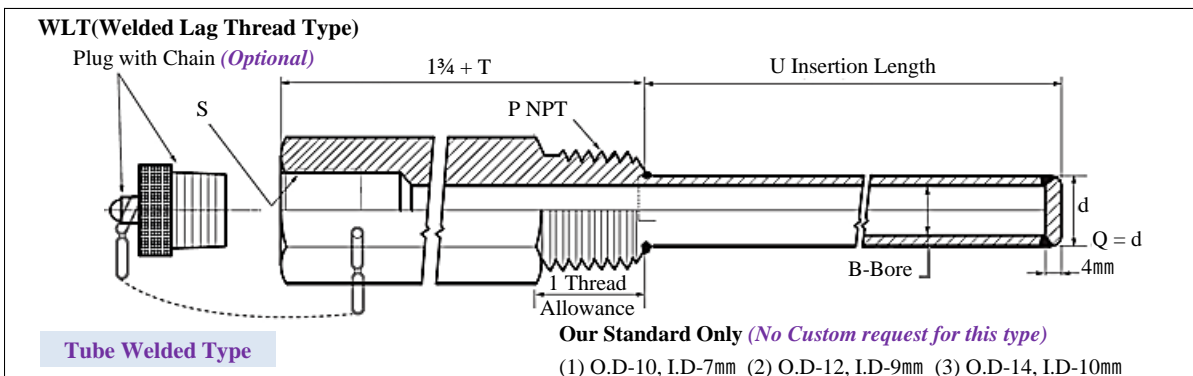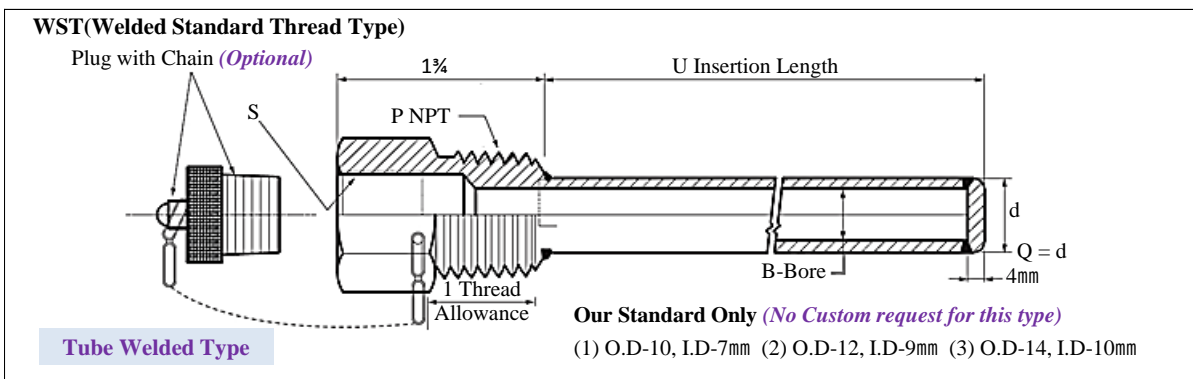

| FLOW | | PRESSURE | | TEMPERATURE | | AC | | DC | | BATTERY | | OUTPUT | | CONTACT | | DISPLAY |

THREAD WELLS SERIES

BST(Straight Standard Thread Type)

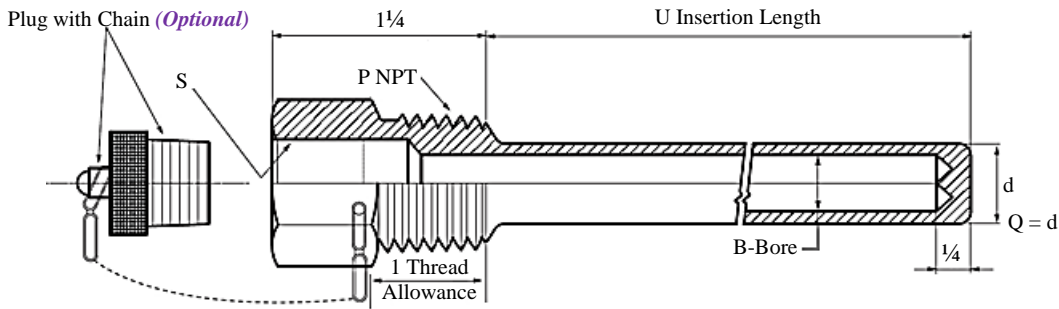


Bar Drilled Type

Our Standard Only (No Custom request for this type)


(1) O.D-10, I.D-7mm (2) O.D-12, I.D-9mm (3) O.D-14, I.D-10mm

BLT(Straight Lag Extension Thread Type)

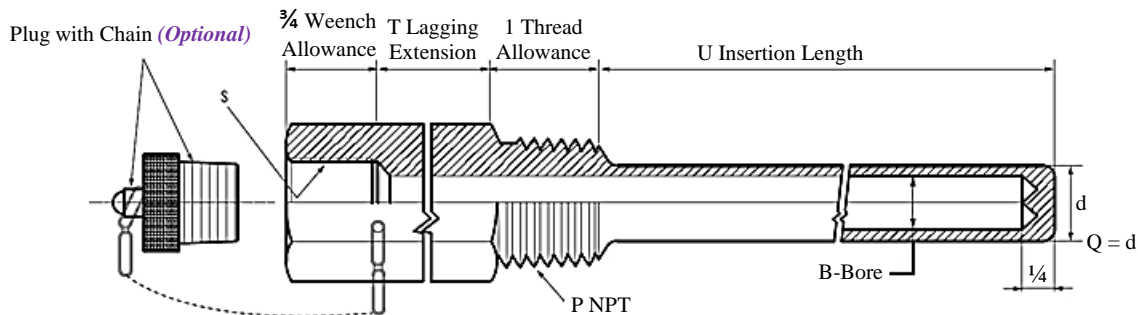

Bar Drilled Type

BTT(Tapered Standard Thread Type)

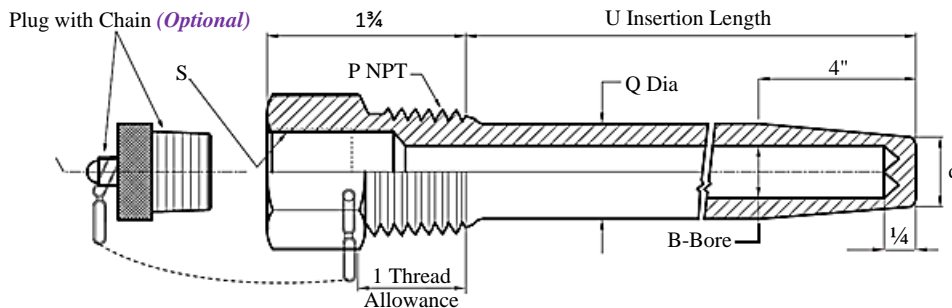


Bar Drilled Type

Standard: Q x d

(1) 19 x 15mm (2) 25 x 22mm (3) 22 x 19mm

THREAD WELLS SERIES

BTLT(Tapered Lag Extension Thread Type)

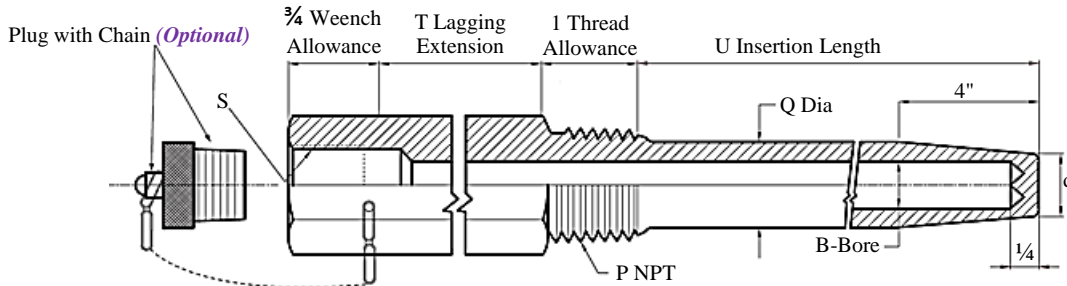


Bar Drilled Type

Standard: Q x d


(1) 19 x 15mm (2) 25 x 22mm (3) 22 x 19mm

BPST(Stepped Standard Thread Type)

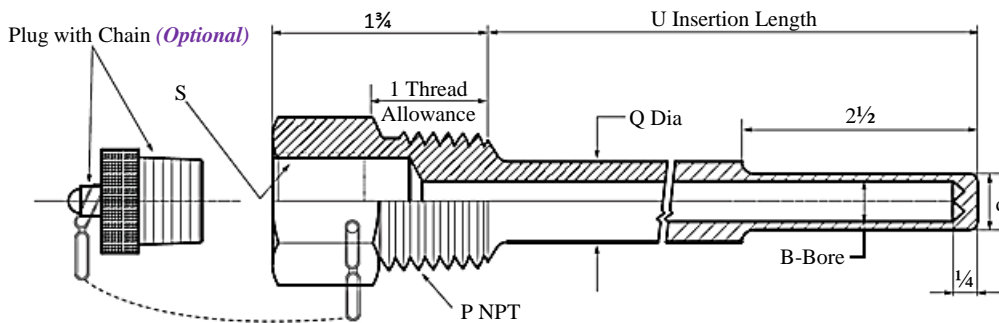

Bar Drilled Type

BPLT(Stepped Lag Extension Thread Type)

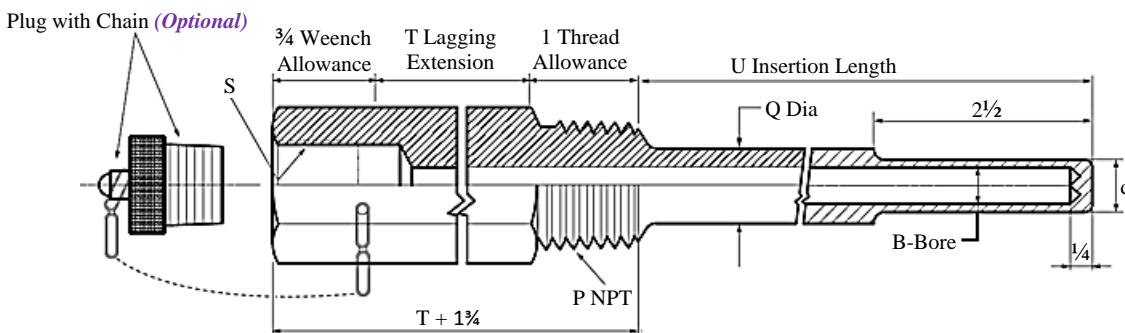

Bar Drilled Type