

THERMOWELL

FLANGE TYPE THERMOWELL

Approvals:



| SIZE | STEM LENGTH | FLANGE |
|-----------|------------------------|-----------------------------|
| 1/2" ~ 4" | Max. 1000 mm | JIS ANSI DIN |

SPECIFICATION

| | |
|----------------------------|--|
| MODEL | Welded type : WSF, WLF Drilled bar stock type : BSF, BLF, BTF, BTLF, BPSF, |
| MATERIAL | Carbon Steel / Brass 304SS / 316SS / 316LSS Monel Hastelloy C276 Titanium Teflon Lining |
| PROCESS FLANGE SIZE | 1/2"~4" JIS, ANSI, DIN |
| LAG LENGTH "T" | 3", 6" Other length available |
| BORE DIAMETER "B" | 6, 7, 8, 9, 10 mm |
| STEM LENGTH | Max. 1000mm |




Thermowell



Teflon lining thermowell with RTD

FLANGE WELLS SERIES





*F:Length is suitable for flange size 3/4", 1", 1-1/2", 2", and flange rating 150# & 300#. Other size and rating (F) length is by maker standard.

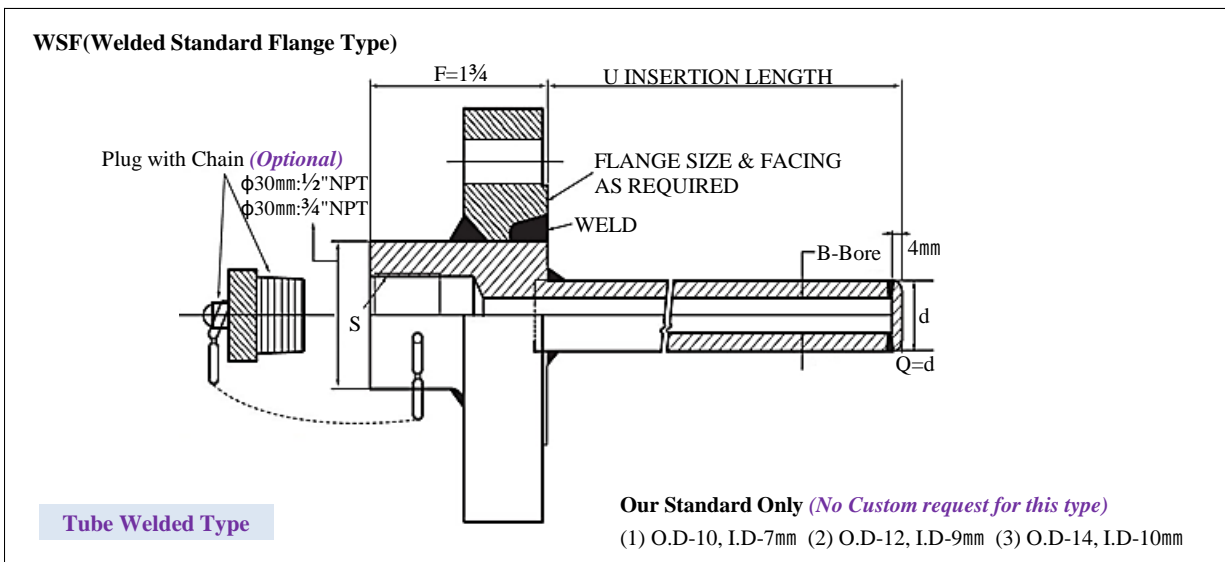

FLOW | PRESSURE | TEMPERATURE | AC | DC | BATTERY | OUTPUT | CONTACT | DISPLAY

FLANGE WELLS SERIES




*F: Length is suitable for flange size 3/4", 1", 1-1/2", 2", and flange rating 150# & 300#.
Other size and rating (F) length is by maker standard.

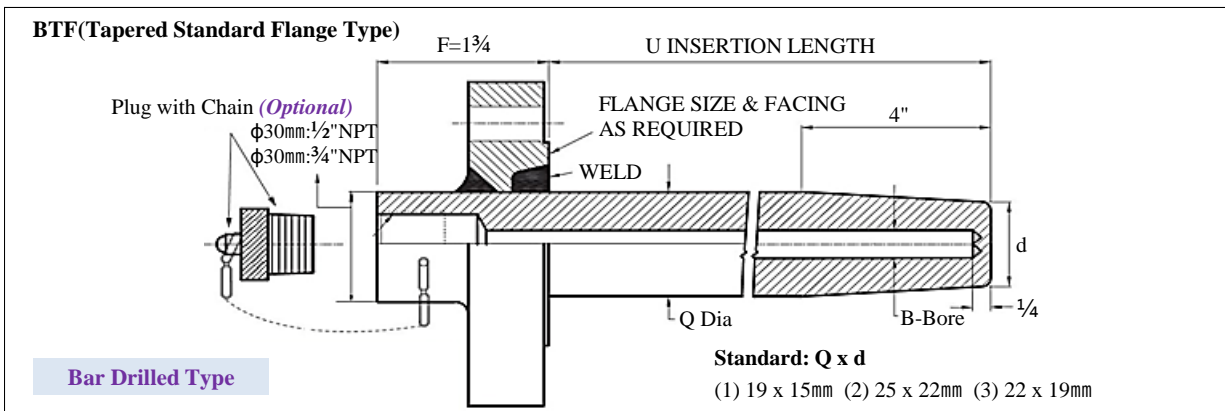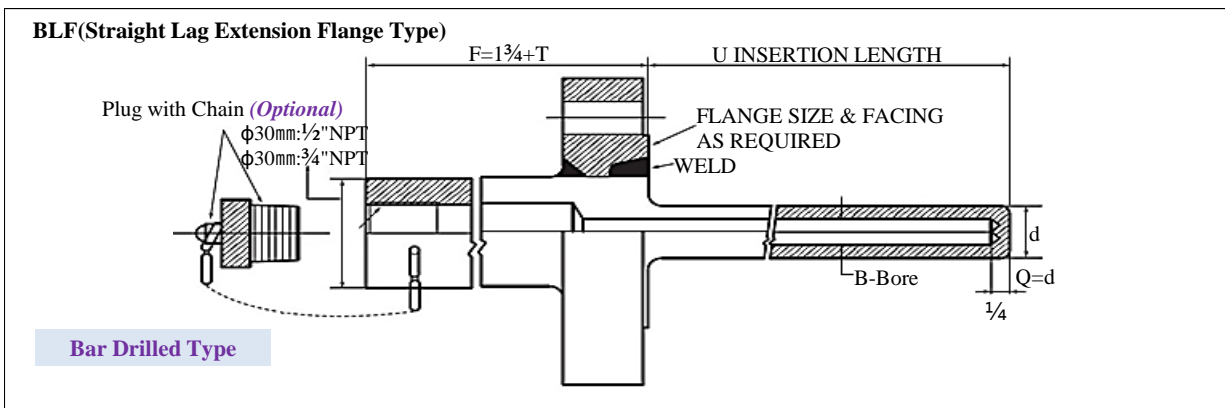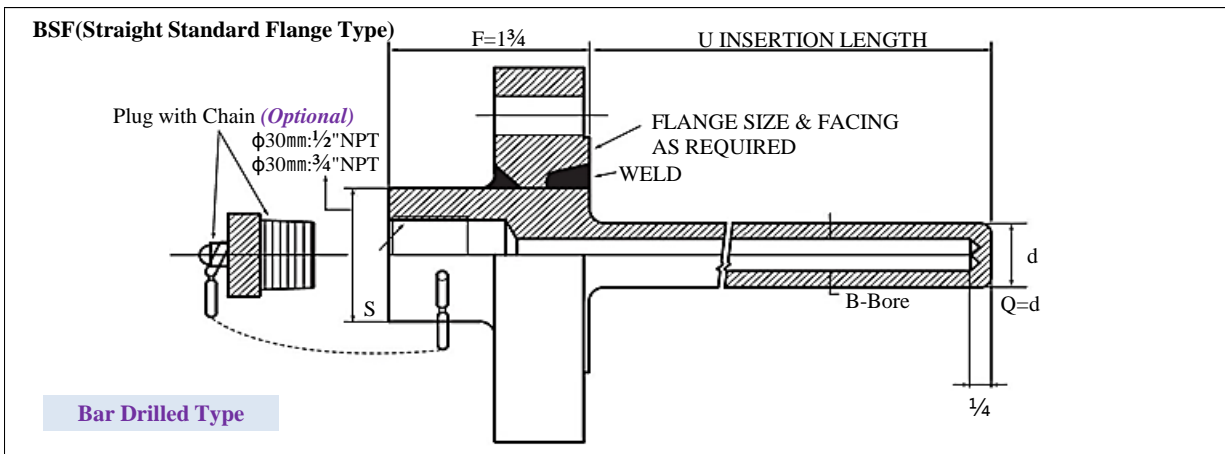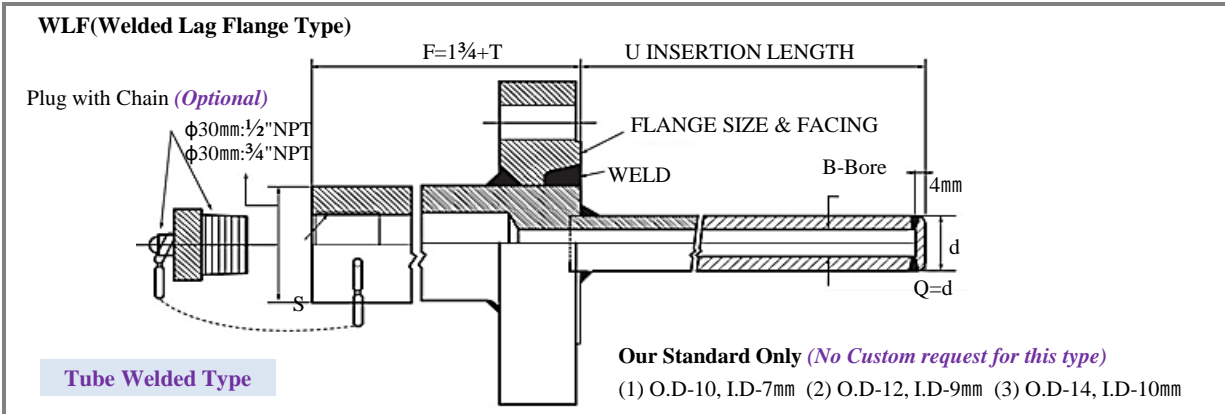

| FLOW | | PRESSURE | | TEMPERATURE | | AC | | DC | | BATTERY | | OUTPUT | | CONTACT | | DISPLAY |

FLANGE WELLS SERIES

*F: Length is suitable for flange size 3/4", 1", 1-1/2", 2", and flange rating 150# & 300#.
Other size and rating (F) length is by maker standard.

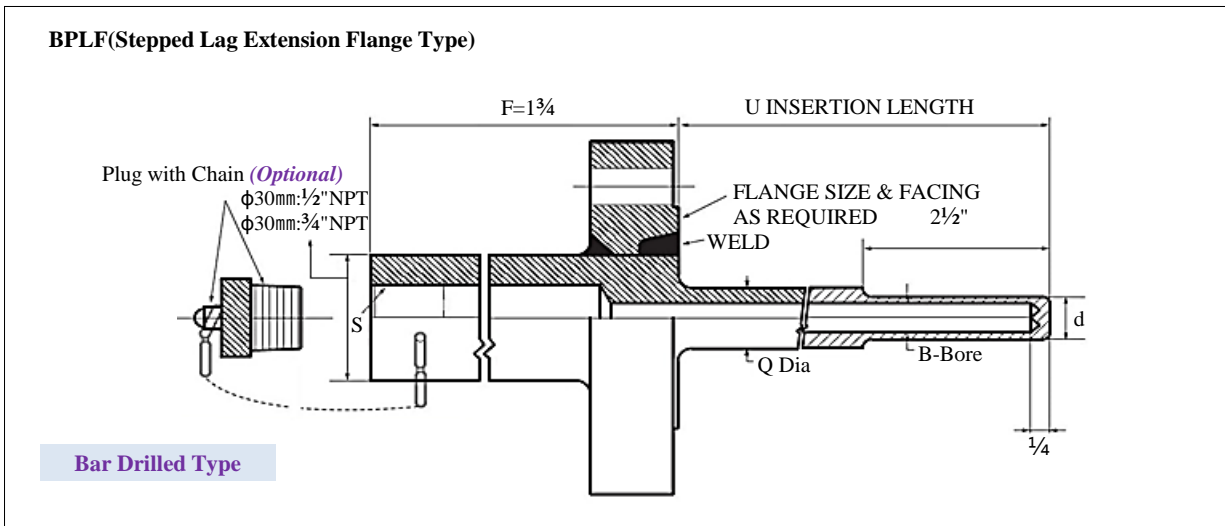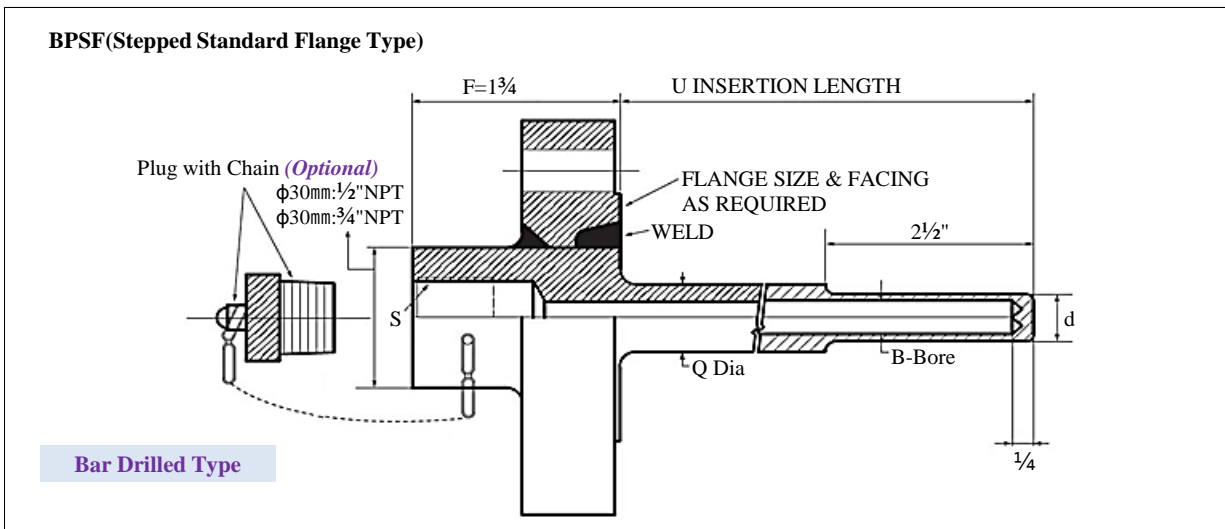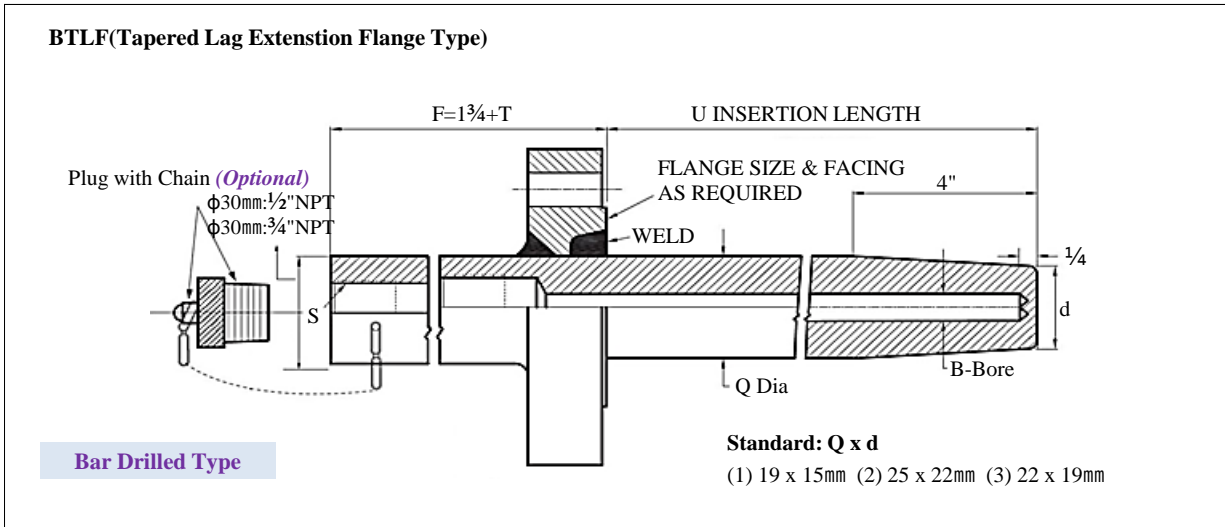

FLOW | PRESSURE | TEMPERATURE | AC | DC | BATTERY | OUTPUT | CONTACT | DISPLAY