

# PLD

## LARGE SIZE TEMPERATURE INDICATOR

DISPLAY	INPUT	OUTPUT
LED 4-Digit	4-20 mA PT100 Ω	4-20 mA 2-Relay



### SPECIFICATION

MODEL	PLD
DISPLAY	4-Digit Red LED
ACCURACY	±0.2% F.S.
SAMPLING CYCLE	200ms
INPUT	DC4-20mA PT100Ω*
OUTPUT	None DC4-20mA+2-Relays output* 1~5VDC+2-Relays output*
SWITCH DATA	DC24V-1A, AC120V-1A, AC240V-0.5A
AMBIENT TEMPERATURE	-10 to 60°C
HOUSING MATERIAL	Steel
POWER	AC110 / 220V, 50~60Hz
FEATURE	Adjustable Scale & Decimal Point Peak Hold Correction of error Adjustable Dead Band [ 2-digit ] Built in power supply for transmitter [ DC24V ]
MOUNTING	Panel mounting Type


### ACCESSORY

Panel Mounting Bracket  
고정 브라켓 ( 기본 포함 )



### DIMENSION (mm)

※ 제품의 사양에 따라 변경 될 수 있습니다

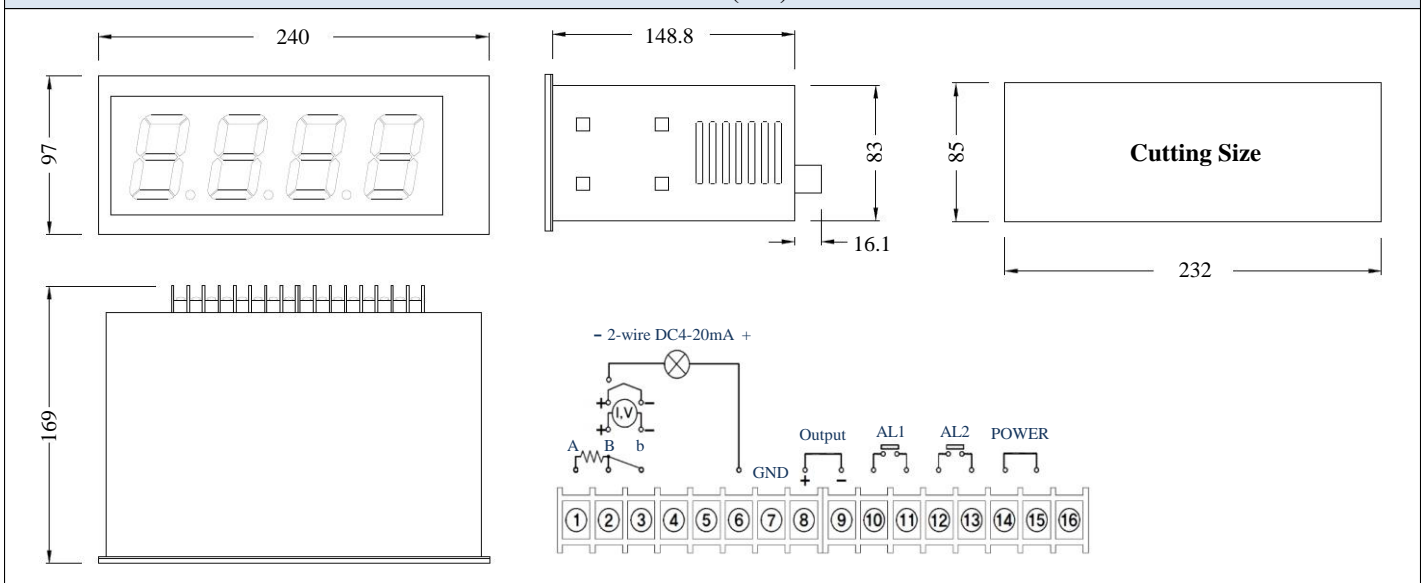

### Ordering Information

