

DISPLAY	INPUT	OUTPUT
Flow Rate Totalizer	Pulse	4-20mA Pulse 2-Relay 1~5V RS 485/232




### SPECIFICATION

MODEL	FM
DISPLAY	2 Lines Back-Lighted LCD Flow Rate & Totalizer
TIME BASE	Unit per Second / Minute / Hour
DISPLAY UPDATE RATE	0.25 / 0.5 / 1 / 2 Second
INPUT	Pulse
OUTPUT	DC4-20mA, Pulse 2-Relay (5A 250VAC)* DC1~5V* RS485* / RS232*
AMBIENT TEMPERATURE	0 ... 60°C
HOUSING MATERIAL	ABS
POWER	AC220V DC24V* / DC12V*
TRANSDUCER SUPPLY	DC12V 50mA

\* = Optional

### DIMENSION

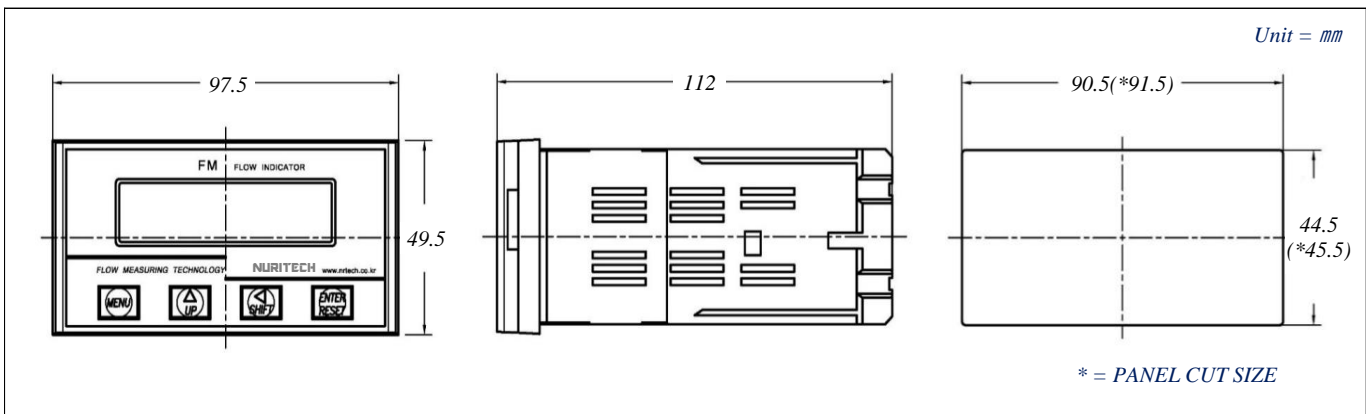

| FLOW | | PRESSURE | | TEMPERATURE | | AC | | DC | | BATTERY | | OUTPUT | | CONTACT | | DISPLAY |