

BM

BATCH COUNTER

DISPLAY	INPUT	OUTPUT
Batch Flow Rate Totalizer	Pulse	2-Batch Relay 4-20mA




SPECIFICATION

MODEL	BM
DISPLAY	2 Lines Back-Lighted LCD Batch, Flow Rate* & Totalizer
TIME BASE	Unit per Second / Minute / Hour
DISPLAY UPDATE RATE	0.25 / 0.5 / 1 / 2 Second
INPUT	Pulse
OUTPUT	2-Batch Relay (5A 250VAC) DC4-20mA*
AMBIENT TEMPERATURE	0 ... 60°C
HOUSING MATERIAL	ABS
POWER	AC220V DC24V* / DC12V*
TRANSDUCER SUPPLY	DC12V 50mA

* = Optional

DIMENSION

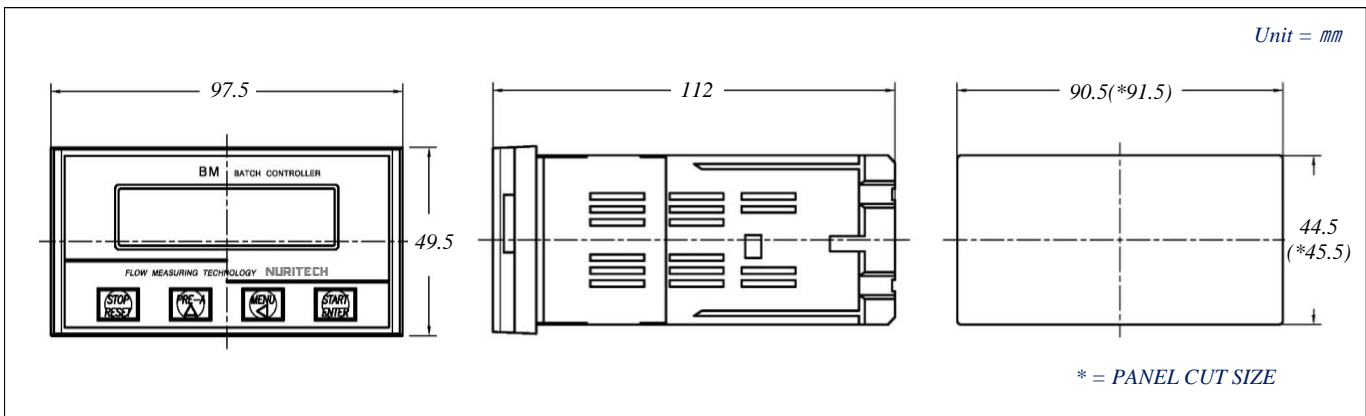

| FLOW | | PRESSURE | | TEMPERATURE | | AC | | DC | | BATTERY | | OUTPUT | | CONTACT | | DISPLAY |